




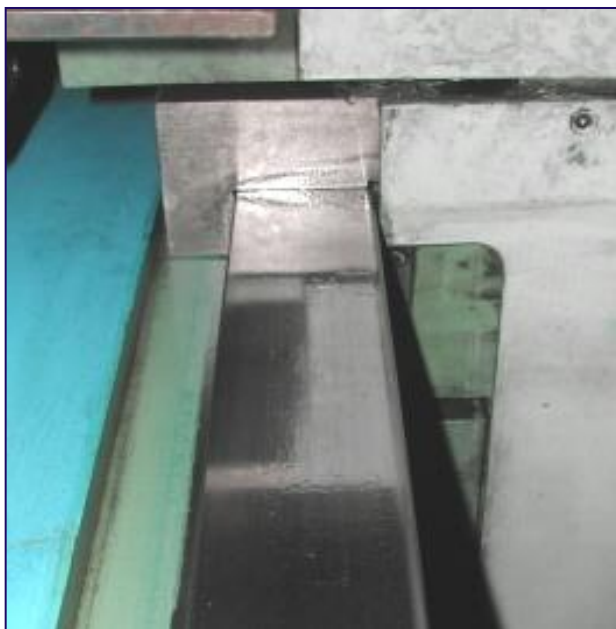


WAYLUBE

Slideway Lubricant

**Clings to ways for long-term lubrication,
reducing wear and extending equipment life**



-  Provides long-term lubrication
-  Protects ways and riders from wear
-  Resists oxidation and prevents corrosion
-  Resists wash off by soluble cutting oils
-  No heavy metals or chlorinated additives

PROBLEM

Workpiece disfigurement

SOLUTION

WAY LUBE lubrication helps reduce work piece disfigurement caused by inadequate lubrication

Ways and riders wear excessively

WAY LUBE forms viscous, adherent films on ways and riders, reducing runoff and protecting them from wear. Contains friction modifiers for smooth operation

Deposits and corrosion

WAY LUBE additives package resists oxidation to prevent deposits buildup and prevents against corrosion

Washoff impairs lubricant protection

WAY LUBE resists washoff by soluble cutting oils; stays on surfaces for long-term protection


APPLICATION AREAS

Ideal for use in machine shops on ways supporting the motion of production machines:

- Carriages
- Worktables
- Tool holders
- Saddles
- Various types of heads

Also ideal for:

- Feed screws
- Columns
- Gibs
- Slides
- Cross-heads
- Guides
- Low-loaded worm gears

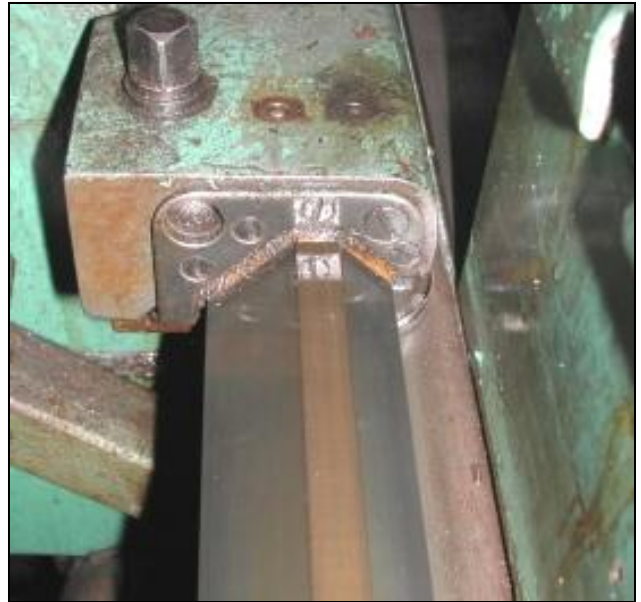

TECHNICAL DATA

ISO Viscosity grade	68
Colour	Amber
Flash point	225°C
Pour point	-30°C
Viscosity index	95
Viscosity kinematic	68cSt at 40°C
Viscosity kinematic	8.5cSt at 100°C
Specs	ISO 3498 – G68

* Consult the label for full instructions and precautions before using this product.

Company

Address